


IE2

# TECHNICAL DATASHEET 3 PHASE INDUCTION MOTOR



| Sr No                                                                                                                                         | Parameter                             | Unit              | Data                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-------------------|--------------------------------------|
| <b>Product Specifications</b>                                                                                                                 |                                       |                   |                                      |
| 1                                                                                                                                             | Rated Output                          | kW                | 0.75                                 |
| 2                                                                                                                                             | Number of Poles                       | No                | 2                                    |
| 3                                                                                                                                             | Frame Designation                     |                   | KM80                                 |
| 4                                                                                                                                             | Product Code                          |                   | KM2.0T75.AGA.B05.TSS                 |
| 5                                                                                                                                             | Mounting                              |                   | B5                                   |
| <b>Electrical</b>                                                                                                                             |                                       |                   |                                      |
| 6                                                                                                                                             | Type of Duty                          |                   | Continuous S1                        |
| 7                                                                                                                                             | Rated Voltage                         | V                 | 415 $\pm$ 10%                        |
| 8                                                                                                                                             | Rated Frequency                       | Hz                | 50 $\pm$ 5%                          |
| 9                                                                                                                                             | Rated Speed                           | RPM               | 2830                                 |
| 10                                                                                                                                            | Rated Current                         | A                 | 1.62                                 |
| 11                                                                                                                                            | Method of Starting                    |                   | Direct On Line                       |
| 12                                                                                                                                            | Starting Current (SCC)                | % of FLA          | 600                                  |
| 13                                                                                                                                            | Rated Torque                          | Kg-m              | 0.26                                 |
| 14                                                                                                                                            | Starting Torque (STT)                 | % of FLT          | 250                                  |
| 15                                                                                                                                            | Maximum Torque (POT)                  | % of FLT          | 300                                  |
| 16                                                                                                                                            | Efficiency at 100% / 75% / 50% load   | %                 | 77.4 / 77.4/ 75                      |
| 17                                                                                                                                            | Power factor at 100% / 75% / 50% load |                   | 0.83 / 0.78 / 0.72                   |
| 18                                                                                                                                            | Thermal Withstand Time (Hot)          | s                 | 6                                    |
| 19                                                                                                                                            | Thermal Withstand Time (Cold)         | s                 | 12                                   |
| 20                                                                                                                                            | Thermal Time Constant (Stator)        | min               | 30                                   |
| 21                                                                                                                                            | Connection / Number of Terminals      |                   | Star / 6                             |
| 22                                                                                                                                            | Permissible Starts/hour (Hot/Cold)    | Nos               | 2/3                                  |
| 23                                                                                                                                            | Insulation Class / Thermal Limit      |                   | F/B                                  |
| 24                                                                                                                                            | Winding Treatment                     |                   | VPI, Dual Coat Copper Wire           |
| <b>Mechanical</b>                                                                                                                             |                                       |                   |                                      |
| 25                                                                                                                                            | Degree of Protection                  |                   | IP55                                 |
| 26                                                                                                                                            | Enclosure / MOC /Method of Cooling    |                   | TEFC / AL/ IC411                     |
| 27                                                                                                                                            | Bearing DE/NDE                        |                   | 6204ZZ/6204ZZ                        |
| 28                                                                                                                                            | Type of Coupling                      |                   | Direct/Flexible                      |
| 29                                                                                                                                            | Noise Level                           |                   | As per IS12065                       |
| 30                                                                                                                                            | Vibration Level                       |                   | As per IS12075                       |
| 31                                                                                                                                            | Moment of Inertia GD <sup>2</sup>     | kg-m <sup>2</sup> | 0.0034                               |
| 32                                                                                                                                            | Position of Terminal Box              |                   | TOP                                  |
| 33                                                                                                                                            | Maximum Cable Size                    |                   | 1X3CX4 mm <sup>2</sup>               |
| 34                                                                                                                                            | Direction of Rotation                 |                   | Bidirectional ( Default: CW from DE) |
| 35                                                                                                                                            | Paint Shade                           |                   | RAL 7046- Telegrey                   |
| 36                                                                                                                                            | Net weight                            | kg                | 9.90                                 |
| 37                                                                                                                                            | Accessories                           |                   | NA                                   |
| <b>Enviromental</b>                                                                                                                           |                                       |                   |                                      |
| 38                                                                                                                                            | Ambient Temperature /Temperature Rise | °C                | 50 / 70 (By resistance method)       |
| 39                                                                                                                                            | Altitude Above MSL                    | m                 | $\leq$ 1000                          |
| <b>Notes:</b> All performance data shall be subject to tolerances as per IS15999/IEC 60034.<br>Applicable Standards:IS 12615-2018, IS 15999-1 |                                       |                   |                                      |
| Customer                                                                                                                                      |                                       | PO No./ Enq. No   |                                      |
|                                                                                                                                               |                                       | Date              |                                      |
| Checked                                                                                                                                       | BMD                                   | 27/10/2022        |                                      |
| Approved                                                                                                                                      | SSN                                   | 27/10/2022        | Document No: KM2-001 Rev.0           |
| <b>KIRLOSKAR OIL ENGINES LTD.</b><br>ELECTRIC MOTORS                                                                                          |                                       |                   |                                      |


# PERFORMANCE CURVE

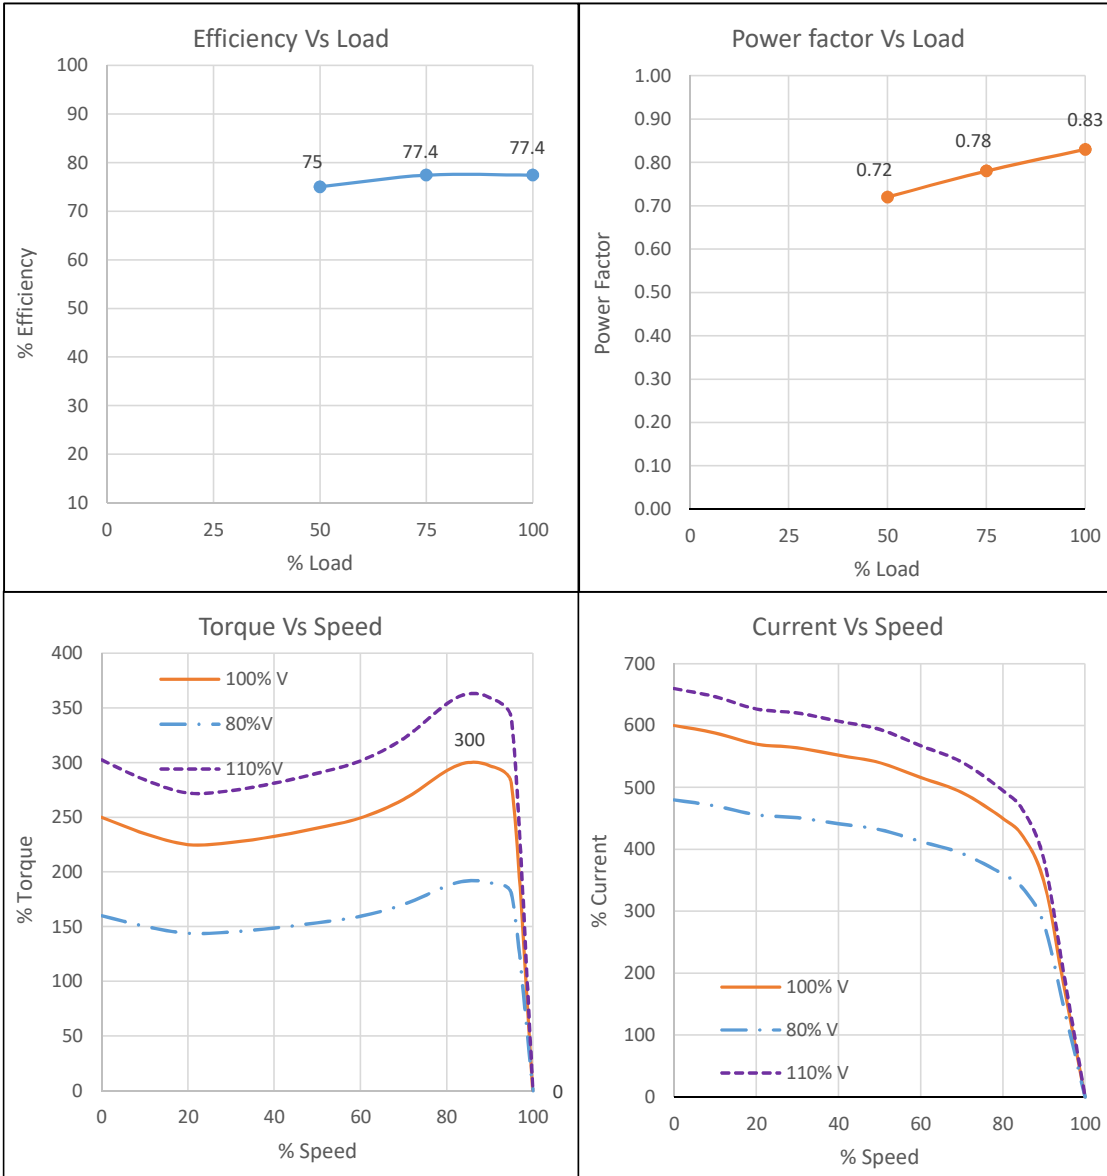


|          |      |                 |                            |
|----------|------|-----------------|----------------------------|
| kW       | 0.75 | Customer        |                            |
| Pole     | 2    | PO No / Enq. No |                            |
| Frame    | KM80 | Date            |                            |
| Mounting | B5   | Product Code    | KM2.0T75.AGA.B05.TSS       |
| Checked  | BMD  | 27/10/2022      |                            |
| Approved | SSN  | 27/10/2022      | Document No KM2-002 Rev. 0 |

KIRLOSKAR OIL ENGINES LTD.

ELECTRIC MOTORS



# GENERAL ARRANGEMENT DRAWING FOR TEFC 3 PHASE INDUCTION MOTOR

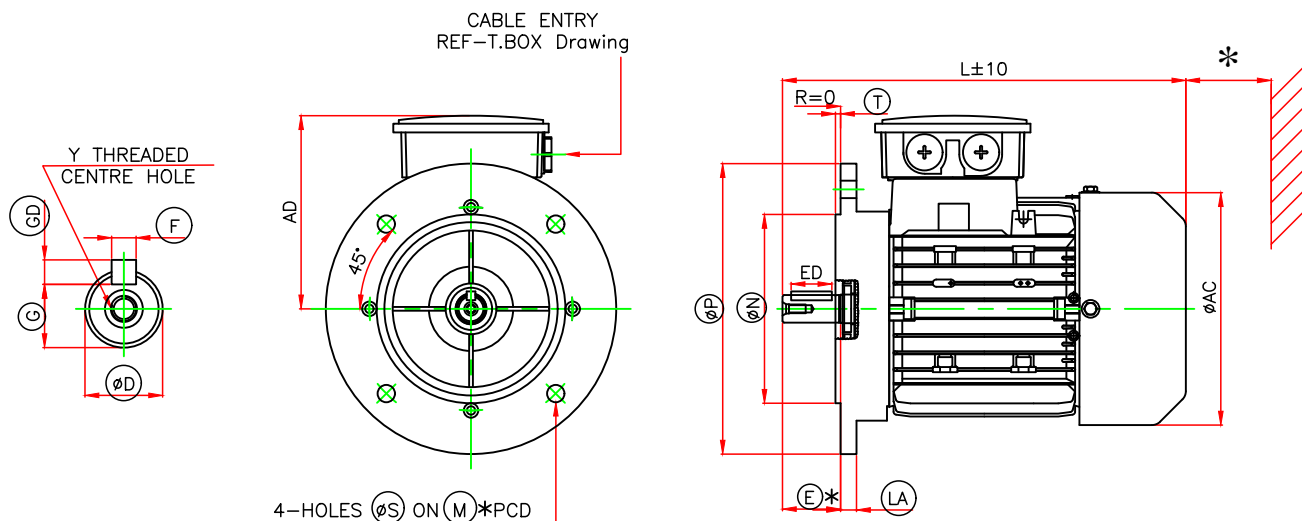

| FRAME | FLANGE FIXING |                 |     |    |     |    | OVER ALL |     |     |
|-------|---------------|-----------------|-----|----|-----|----|----------|-----|-----|
|       | M TOL.        | N TOL.          | P   | S  | T   | LA | AC       | L   | AD  |
| KM80  | 165           | 130.014/129.989 | 200 | 12 | 3.5 | 10 | 160      | 278 | 124 |

| D END SHAFT EXTENSION AND KEY |    |    |        |         |           |       |
|-------------------------------|----|----|--------|---------|-----------|-------|
| D TOL.                        | E  | ED | F TOL. | GD TOL. | G         | Y     |
| 19.009/18.996                 | 40 | 28 | 6/5.97 | 6/5.97  | 15.5/15.4 | M6X16 |

| kW   | PRODUCT CODE         | PRODUCT CODE         | PRODUCT CODE         | PRODUCT CODE         |
|------|----------------------|----------------------|----------------------|----------------------|
|      | 2 POLE               | 4 POLE               | 6 POLE               | 8 POLE               |
| 0.18 | --                   | --                   | --                   | KM2.0T18.DGA.B05.TSS |
| 0.25 | --                   | --                   | --                   | KM2.0T25.DGA.B05.TSS |
| 0.37 | --                   | --                   | KM2.0T37.CGA.B05.TSS | --                   |
| 0.55 | --                   | KM2.0T55.BGA.B05.TSS | KM2.0T55.CGA.B05.TSS | --                   |
| 0.75 | KM2.0T75.AGA.B05.TSS | KM2.0T75.BGA.B05.TSS | --                   | --                   |
| 1.1  | KM2.1T10.AGA.B05.TSS | --                   | --                   | --                   |

## NOTES:

- ONE EARTHING TERMINAL IS PROVIDED INSIDE MAIN TERMINAL BOX.
- \* 80mm MINIMUM DISTANCE TO BE MAINTAINED FOR EFFICIENT COOLING OF THE MOTOR.
- \* TOLERANCES ON MANDATORY DIMENSIONS ARE AS PER IS:2223/IEC:60072

RINGED DIMENSIONS ARE AS PER IS:2223/IEC:60072

ALL DIMENSIONS ARE IN mm,

|          | NAME | DATE       | kW              | REFER TABLE            | FRAME    | KM80                    |
|----------|------|------------|-----------------|------------------------|----------|-------------------------|
| DRAWN    | KSK  | 20/10/2022 | POLE            | REFER TABLE            | MOUNTING | B05 (HORIZONTAL FLANGE) |
| CHECKED  | SGS  | 20/10/2022 | PRODUCT CODE    | REFER TABLE            | CUSTOMER |                         |
| APPROVED | SSN  | 20/10/2022 | MAX. CABLE SIZE | 1RX3CX4MM <sup>2</sup> | PO NO    |                         |
|          |      |            | PROJECT         |                        | CLIENT   |                         |

KIRLOSKAR OIL ENGINES LTD.  
ELECTRIC MOTORS

DO NOT SCALE  
FORMAT NO.:KM-GA-2021 R0

DRAWING NO  
KM80B5TSALR0

